




## ENGINEERED TERRAZZO



### XSMALL 2017

We have decided to introduce the "XSmall" series into the market as one of the main new product ranges for 2016, from the new Veniston collections. This series is made by the using extra large pieces of aggregate in the mix. The product range XSmall gives the architect and the designer infinite possibilities with its unique combinations.

### DIMENSIONS

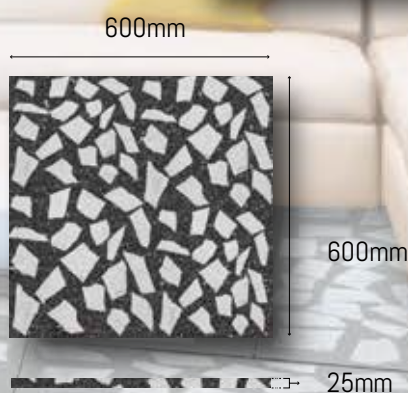

Thickness can be changed to meet customer requirement and insofar as this is compatible with the production process.



XSMALL 01



XSMALL 02




XSMALL 03



XSMALL 04




XSMALL 05

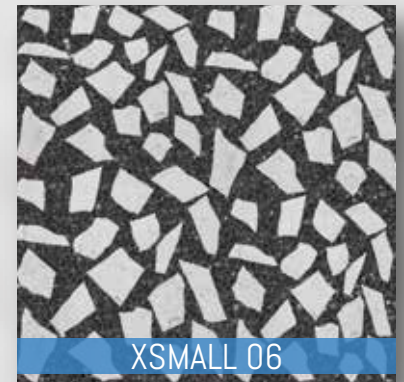

XSMALL 06



XSMALL 07

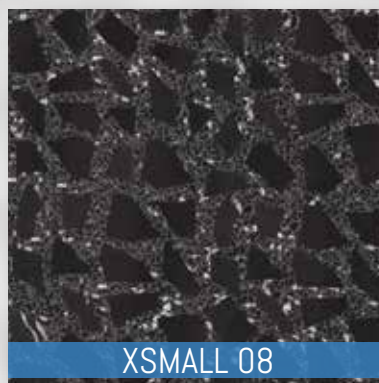

XSMALL 08



XSMALL 09

Terrazzo floor tiles for internal use, thickness class I

Essential characteristic	Performance
<b>mm 600X600X25</b>	
Reaction to fire	Class A1 , without testing (see decision 96/603/EC, as amended)
Water tightness	<8%
Mean Breaking strength	>5Mpa
Breaking load	class 1 <sup>a</sup>
Dimensional deviations edge	+/- 0,3%
Dimensional deviations thickness	+/- 2mm
Resistance to deep abrasion(capon test)	No individual test result exceed 25mm

The material, and in particular the information, contained in this page and literature, including technical information, are representative only and are subject to change or updating without notice. VENISTON S.r.l. further reserves the right to make changes and/or improvements to the products and/or the technical and functional characteristics of the products described and illustrated on this site at any time, without notice. The information and related graphics published on this page could include technical inaccuracies or typographical errors although every effort has been made for accurate information. The testing are valid for material at the end of the production line.